




TPTCM60III

60mm ticket / receipt printer

- Best quality print quality (200 DPI)
- Paper width: 60mm
- Paper thickness: from 63 to 100 μ m
- Printing > 140 mm/sec
- Up to 160mm paper roll diameter (with optional mounting bracket kit)
- RS232 + USB interfaces
- Highly reliable cutter: > 1,000,000 cuts
- Sensors: head temperature, paper presence, print head opening, paper end and near paper end

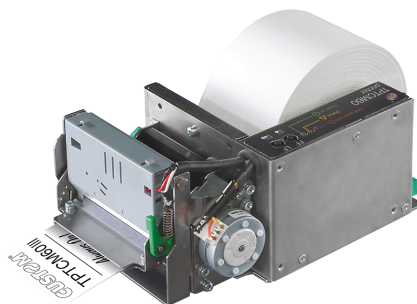

CHARACTERISTICS

- 1D/ 2D (QR CODE) barcode printing feature
- International fonts on board: any language available
- Strong motorised dispenser available
- Sturdy and reliable: robust and light mechanical parts
- Versatile: **optional** paper roll holder - 5 positions
- Illuminated paper outfeed (LED)
- DIN power supply connector
- Cut&drop version available
- Plastic paper bezel (optional)

APPLICATIONS:

- Self-service kiosks
- Banking machines and cash dispensers
- Vending machines: milk, water, wine, liquid detergents
- Industrial machines
- Queue management systems
- Parking systems
- Quality control


SOFTWARE:



PrinterSet SOFTWARE : to update logos, edit characters, set operating parameters and update the printer firmware. It allows you to create a file including the different SW customizations and send them to the printer via the interface provided, for easy and fast setting.

- Auto-installing drivers for WinXP/Vista/7/8/Linux
- Remote Status Monitor
- CustomPowerTool

AVAILABLE VERSIONS:




TPTCM60III L

- Industrial labelling machine for heavy workloads
- Label width: 60mm
- Embedded rewinder for easy and safe label unwrapping
- Adjustable label roll holder with near paper end sensors
- Label roll with max. diameter of up to 80mm
- RS232 + USB interfaces


TECHNICAL SHEET

Printing Method	Thermal with fixed head
Number of dots	8 dots/mm
Resolution	203 DPI
Printing (mm/sec)	>140 mm/sec
Character set	International (default), Chinese, Korean
Supported Barcode	UPCA, UPCE, EAN13, EAN8, CODE39, ITF, CODABAR, CODE93, CODE128, CODE32, PDF417, DATAMATRIX, AZTEC, QRCODE
Printing Format	Height and width from 1 to 8, bold, negative, underlined, script
Printing Direction	Straight, 90°, 180°, 270°
Paper width	60 mm
Paper weight	from 60 to 90 g/m ²
Paper thickness	from 63 to 100 µm
Roll Dimension	max 160 mm (90 mm without roll holder stirrup)
Emulation	CUSTOM/POS, TPTCMII
Interfaces	RS232 + USB
Data Buffer	16 KB
Flash Memory	1MB internal, 4MB external
RAM Memory	128Kb internal, 8MB external
Drivers	WIN XP, Vista-7-8 (32/64bit), Linux
Software Tools	PrinterSet, CustomPowerTool, Status Monitor
Power supply	24 Vdc ± 10%
Medium consumption	1.2A (12.5% dots turned on)
MTBF	122,000 hours (electronic board)
Head Life	50 Km / 100M pulses
MCBF	1,000,000 cuts
Operating temperature	0°C + 50°C
Dimensions	194.5(L)x80.3(H)x112.4(W) mm with short paper mouth 265.5(L)x80.3(H)x115(W) mm with dispenser
Weight	1.2 Kg (without ejector) 1.5 Kg (with ejector)


MODELS



915KU010100300
PRINTER TPTCM60III USB RS232



915KU010300300
PRINTER TPTCM60III USB RS232
EJECTOR



915KU010400300
PRINTER TPTCM60IIIL USB RS232
NOTCH

CUSTOM SPA - Via Berettine, 2 - 43010 Fontevivo PR - VAT: IT02498250345 - TEL: +39 0521 680111 - FAX: +39 0521 610701 - UNIQUE CODE: TI80WI0

The technical data on this website are not binding and may be changed without advanced notice.

Last update: 22 January 2020

